

V Expressions Ltd



ATLAS Expansion Pack

a sound enhancing expansion pack for the Roland TD-50X Drum Module

TD-50X

End User License Agreement (EULA)

This is a legal agreement ("this Agreement") between you and V Expressions Ltd., ("V Expressions Ltd."). This Agreement pertains to your use of the V Expressions Ltd. expansion programming, documentation and updates which are provided to you by V Expressions Ltd (collectively, the "Product"). By purchasing a V Expressions Ltd. Product, you are consenting to the terms of this Agreement.

This Agreement grants you a personal, exclusive, non-transferable, non-sub licensable right to use one copy of the V Expressions Ltd. Product for your own personal use on a single computer and/or compatible drum module. V Expressions Ltd. reserves all rights in the Product not expressly granted herein, including ownership and proprietary rights.

This software may not, in whole or in any part, be copied, reproduced, resold, transmitted, translated (into any language, natural or computer), reduced to any electronic medium or machine readable format, or by any other form or means without prior consent, in writing, from V Expressions Ltd.

License Restrictions: You may not reproduce or distribute the Product. You may not copy the Product to any media, server or location for reproduction or distribution. You may not reverse engineer, de-compile or disassemble the Product or otherwise attempt to derive the source code for the Product, or without limitation, redistribute, sublicense, or otherwise transfer rights in the Product. This Product may not be rented, lent or leased. The restrictions contained herein apply equally to any updates that may be provided to you by V Expressions Ltd..

Disclaimer of Warranties: Products provided by V Expressions Ltd. are provided "As Is". V Expressions Ltd. makes no warranty to you or any other entity.

Limitation of Liability: In no event shall V Expressions Ltd. or its employees and/or partners be liable to you or any third party for any costs or damages arising directly or indirectly from the use of the V Expressions Ltd. Product, including without limitation any actual, incidental, consequential, exemplary, punitive, reliance or special damages, or for any loss of reATLAS, profits, use, data, goodwill or business opportunities of any kind or nature whatsoever, arising in any manner from any cause or action or claim relating to this Agreement and to the Product provided by V Expressions Ltd..

Indemnification: You agree to indemnify and hold V Expressions Ltd., its employees and partners harmless from and against any and all damages, losses, costs including attorney fees and expenses resulting from any violation by you of this Agreement or asserted by any third party due to or arising out of your use of or conduct with respect to the Product.

Jurisdiction and Other Provisions: This Agreement and the relationship between V Expressions Ltd. and you shall be governed in accordance with the laws of the State of Florida. Any dispute between you and V Expressions Ltd. regarding this Agreement will be subject to the exclusive jurisdiction of the state and federal courts in the State of Florida.

You acknowledge that you have read this Agreement and understand it and that, by purchasing and/or using the product, you agree to be bound by its terms and conditions.

V Expressions Ltd. products are the Intellectual Property of V Expressions Ltd., its employees and/or partners. Violators of Intellectual Property rights will be prosecuted.

Copyright IP © 1997-2023, V Expressions Ltd.

Introduction

Thank you for purchasing V Expressions Limited's **ATLAS for TD-50X!**

This expansion pack intended for the TD-50X provides 20 unique and specialized stereo drum kit selections.

Please note that this Atlas file will not load or work in a Non-Expanded TD-50 or any other module.

Atlas provides you with plug n play kits designed for ease of use, selection, and 'fit your mix' capabilities. Fully genre based, Atlas is variety laden with something new for many musical situations, recording and live performance alike. Most of the pack is acoustic drum based, featuring well defined kicks/snare/toms for real world use. Well thought out cymbal selections and tunings provide a balanced group of cymbals custom tailored to each kit. Modern Electronic/EDM inspired kits cover a wide array of musical creation. Programmed with an assortment of excellent instrumentation, the use of multiple master effect engines make playing fun and interesting, along with well-placed percussive accessories programmed through many of the kits. This pack spotlights great production value for clear/concise recording quality with an overall modern postproduction drum sound approach.

You will find kits for Reggae, Rock, RnB, Pop/Dance, Metal, Country, Funk, Jazz and Fusion, Electronica not to mention many other uses. The acoustic drum kits in this pack are programmed and created with the feel of direct mic'ing along with added ambience, eq, and compression. All models feature wide ambience in stage, studio, and larger room environments.

While developing these kits, many acoustical considerations were carefully thought out and created to translate well in a headphone performance setting and with loudspeakers. Combining our vast knowledge of acoustic drum sets, these kits were created from ear to best fit into various genres of music. What you get is a cohesive drum sound to fit the part perfectly.

You can dial down the ambience and reverb effects without affecting the produced sound of the kit.

For all experience levels and functionality, this pack will deliver a great enhancement to the TD-50X.

The **ATLAS** expansion pack has been ear-created on the TD-50X from scratch on a highly expressive platform.

Exclusively created V Expressions Ltd sample .WAV data has been utilized. These samples have been generally used in the sub layer instrument setting to supply various kits with unique sounds without affecting performance, dynamic feel, and adaptive pad response.

Atlas Kit Listing:

Kit

- | | |
|--------------------|------------------------|
| 1. NY Club | Jazz |
| 2. Chicago Nights | Jazz Blues |
| 3. East Reflection | Fusion |
| 4. Pacific Coast | Funk/Fusion |
| 5. Southern Cross | Classic Rock |
| 6. Golden Child | Classic Rock |
| 7. Kentucky Bound | Country |
| 8. The Bottom-Line | Country & Western |
| 9. Happy Roots | Reggae |
| 10. Calypso Air | Calypso |
| 11. Platinum | Pop / Rock |
| 12. Jump in: Jack | Electronic Dance |
| 13. Mind Signals | Hard Rock |
| 14. Eleven UP | Hard Rock |
| 15. Hammer Down | Metal |
| 16. Thrash Talk | Metal |
| 17. Conga Rain | Atmospheric Percussion |
| 18. It's Go Time | Electronica |
| 19. South Central | Hip Hop |
| 20. Diamond Life | EDM |

Getting Started

To increase customer understanding and awareness, we proudly offer this step-by-step instruction manual to ensure quick and smooth implementation with our expansions.

Comprised of both Roland's and our very own streamlined step-by-step instructions, this helpful document will answer all your questions and get you on your way to playing your new kits.

IMPORTANT - READ BEFORE CONTINUING!!

Accidents can always happen!

We highly recommend backing up your current module to save personal modifications before loading any expansion from V Expressions Ltd. It is important you follow our steps in this guide to achieve the best results during the processes of module back-up, file preparation, and loading of your new V Expressions Ltd expansion.

NOTE: To preserve your pad setup, user sample list, 32 channel driver input settings including all local/vendor custom settings for DAW use, and any custom kits you've created – Make a backup of your setup configuration to the SD card.

Custom user kits **WILL BE ERASED during a load of your expansion backup file**. However, your module's **factory reset data is never touched**, and this original factory state of your module can always be reset at any time. You can load **ATLAS** as a Backup and/ or select each kit individually one by one. **To avoid complications with your custom settings: load the kits individually.**

Please take a moment to read all procedures below before attempting them. If you have questions before attempting any of the procedures below, please refer to your Roland TD-50X Reference or Quick Guide manual, or feel free to email **V Expressions Ltd** from the appropriate link on our website at www.vexpressionsltd.com

When you are ready to begin, start with Section I below.

Section I: Apply Latest Updates

FOR YOUR INSTALLATION AND EXPANSION TO WORK PROPERLY, YOUR MODULE MUST HAVE THE LATEST FIRMWARE UPDATE(S) IMPLEMENTED BEFORE YOU BEGIN!

Check Roland website for updates:

Section II: Formatting your SD Card in the TD-50X

Skip to Section III if you have already used an SD Card with your module!

If you have never used your SD Card with your module, and have no data on it, you should format the card in the module to create your Roland folder structure.

IMPORTANT! Any data on the SD Card WILL BE deleted by formatting the card in the module!

- Step 1:** Carefully insert your SD Card into the TD-50X module.
- Step 2:** Press the **SD CARD** Button.
- Step 3:** PAGE DOWN 2X
- Step 4:** Press F3 FORMAT
- Step 5:** Press F5 FORMAT
- Step 6:** Arrow Right and Press **ENTER** (OK) to confirm and execute the format.


Note: Press Cancel if you do not wish to Format your SD Card.

Section III: Backing up your TD-50X Before Loading the VEX Pack

Make a backup of your module before you continue!

- Step 1:** Insert your SD Card in the TD-50X module
- Step 2:** Press SD Card
- Step 3:** Choose F1 Save
- Step 4:** Use the dial and arrow buttons to make backup settings – choose a backup other than Bank 5.
- Step 5:** Press **SAVE** (you can name backup; once done Press **EXIT**)
- Step 6:** Press **EXECUTE**, Arrow Right and then Press **ENTER**.

Note: Press Cancel at any time if you do not wish to Save a backup to your SD Card.

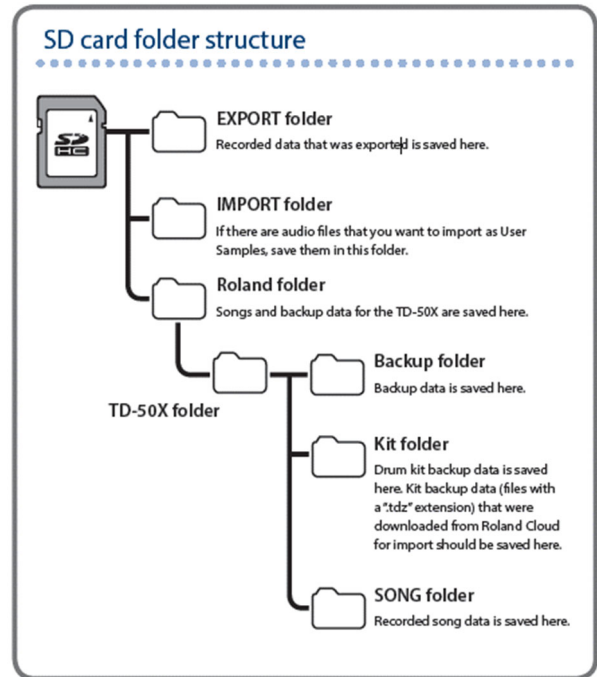

Section III: Saving Your Newly created TD50X Backup to your computer

Ensure the expansion number is unique from any backup number already on your SD card in the "Roland > TD-50X > Backup" folder. Any backup of the same number in this folder **WILL BE OVERWRITTEN!**

- Step 1:** Insert your SD Card into your computer's reader.
- Step 2:** Open the Roland > TD-50X > Backup folder.
- Step 3:** Drag your new backup to your desktop.
- Step 4:** Create a Folder to store the file in, and move file to this folder.
- Step 5:** Once complete: Eject and or remove the SD Card.

Section III: Preparing Your Expansion

Memory Loading Requirements: We recommend a 2 - 16GB SD CARD and a computer/laptop with an SD Card reader. We use a SanDisk 16GB card.

Backup File Information

- One backup file (expansion) supplied
 - **BKUP-005.TD0:** This is **Bank05**, and will read as: **ATLS50X**
 - **Kits 1-80 are stock Roland kits.**
-
- **ATLAS** Kits 81-100 are optimized for stereo headphone use.
 - Kit 81 appears first upon loading.
 - Digital Pads, and all Aux triggers are supported.
 - **ATLAS** Drum kits will load in as Kits 81-100.
 - All **ATLAS** Drum kits are supplied with the Snare Crosstick active using the PD140-DS.
 - To best optimize your trigger performance, please read the Performance Settings Guide on pages vii/ix of this manual.
 - **VOLUME SLIDERS:** set all your slider levels to "0" to start with. Set Ambience to (-5). Adjust as necessary.
 - The Roland VH-14D is fully supported and was used in the creation of ATLAS.

Sample Data Information

- **ATLAS** is supplied with **custom recorded V Expressions Ltd sample .wav files: 44.1 / 16 BIT**
- These samples are embedded in the backup and kit files you downloaded and will load automatically.
- Avoid: Renaming or Optimizing the **ATLAS** Sample Data after it loads. Doing so may harm the model.

Section III: Transferring ATLAS to your SD Card

Ensure the expansion number is unique from any backup number already on your SD card in the “Roland > TD-50X > Backup” folder. Any backup of the same number in this folder **WILL BE OVERWRITTEN!** Atlas is Backup 05.

Step 1: Insert your SD Card into your computer’s reader.

Step 2: Open the Roland > TD-50X > Backup folder that came with your download.

Step 3: Open the Roland > TD-50X > Backup folder on your SD Card.

Step 4: Drag Backup 05 from the download to this folder: “Backup” (on SD Card).

Step 5: Once complete: Eject and or remove the SD Card.

Section IV: Loading Backup Data from an SD Card

Don’t forget! Scroll to the number of your file to see and load it. (Atlas is delivered as bank #05, unless you change it.)

Option A: Load Entire Backup from an SD Card

page 54 in your TD-50X manual

Non-VAD users: Use this method of loading kits if you don’t have any custom trigger settings or daw settings integrated into the module. If so – Skip to option B below.

Press the “KIT” button at any time to cancel the process.

Step 1: Insert your SD card into the TD-50X.

Step 2: Press the [SD CARD] button.

Step 3: Press the PAGE [UP] button several times to access page 1 (SD CARD BACKUP ALL).

Step 4: Press the [F2] (LOAD) button.

Step 5: Choose loading settings. (Scroll to Bank 05 – named: ATLS50X / Keep the user sample box checked.)

Step 6: Press the [F5] (LOAD) button.

Step 7: Select “OK” and press the [ENTER] button.

If it says “No Backup Data” – You need to scroll the dial and select Bank 05

Repeat Step 6/7 (or) if still not working: the pack on SD card is not properly loaded – read Section III and perform steps.

If Screen says: “Processing” it’s working! This will take about a minute as all the sample data loads in.

Once the load completes: Almost ready but.....you are NOT done!

Note: Perform these following steps to align the pack properly to your kit!

Step 8: Recalibrate your VH Series Hi Hat – but if you have a floor pedal with pad setup instead...then skip this.

Step 9: Make sure your pad settings match your kit’s pad types.

Step 10: Re-save a copy of **ATLAS** to your SD Card with your corrected pad settings.

Option B: Copying 1 Kit Data from an SD Card

pages 45-47 in your TD-50X manual

IMPORTANT – PLEASE READ. This loading procedure is recommended for most advanced users.

Use this method of loading the kits:

- 1) All VAD users / acoustic & third-party trigger users
- 2) When custom trigger settings have been created
- 3) When you are using the USB output to connect to DAW using local/vendor settings and drivers
- 4) When you have a fully custom trigger setup/pad configuration

Note: You can copy individual kits from your main backup using the Copy > SD tab in the copy section of your module. Therefore, we do not provide “individual” kits with your expansion as there is no need for them.

Step 1: Insert an SD card into the TD-50X.

Step 2: Hold down the [SHIFT] button and press the [SD CARD] button.

Step 3: Press the PAGE [UP] button several times to access page 1 (SD CARD BACKUP ALL).

Step 4: Press the [F1] (KIT) button.

Step 5: Press the [F3] (SD CARD) button.

Step 6: Choose loading settings. (Select the source and destination kits.)

Step 7: Press the [F5] (COPY) button.

Step 8: Select “OK” and press the [ENTER] button.

Repeat this process for each kit you want to load individually.

Pad Configuration

The pad assignments and trigger information should be set to standard Roland default trigger settings for the following pads:

Kick:	KDA Type - KD-140
Snare:	PD-140DS
Tom(s) 1-4:	PDA/X TYPE - PD108/PD128
HH:	VH-14D
Ride:	CY-18DR
CR1/2:	CY-Type
Aux 1-4:	CY Type

If your pad setup is different than the above-mentioned groupings you will need to write down any/all of your pad types and/or custom trigger settings you may have adjusted. After loading **ATLAS**, you may need to recreate all the custom pad settings you have made (pad type, sensitivity, re-trig, etc.)

This will help align **ATLAS** with your kit configuration. This is important when using your module with other brands.

Note: Try not to overdrive your pad triggers. Lower Sensitivity as much as possible without losing all your volume.

My Pad & Trigger Settings

IMPORTANT: If your pad setup is different than the above, you will need to write down any/all of your pad types and/or custom trigger settings you may have adjusted. After loading, you may need to recreate all the custom pad settings you have made. (pad type, sensitivity, re-trig, etc.)

If you are using custom trigger, older Roland pads, or other hardware: Please take a moment to write down your personal pad and trigger settings before loading your expansion.

IE: Kick drum is a KD-140, Snare is a PD-140 DS, Tom 1 is a PD-108.....

Kick: _____

Snare : _____

Hi Hat: _____

Ride: _____

Tom 1 : _____

Tom 2: _____

Tom 3: _____

Tom 4: _____

Crash 1: _____

Crash 2: _____

Aux 1: _____

Aux 2: _____

Aux 3: _____

Aux 4: _____

Performance Settings

Trigger Sensitivities...

Roland Default TD-50X Sensitivities range from 6-9 depending on which pad you strike. The rule is: the higher the sensitivity setting, the louder the sound will be, but you lose dynamics.

By adjusting the Sensitivity and Threshold settings, this will help prevent mis-triggers, velocity issues, and playability concerns you may be having.

To adjust up or down: go to Pad Settings and mess with the Sensitivity values. Remember: Increasing this value increases the sensitivity, so that even soft strikes on the pad are sounded at high volume (less dynamic). Decreasing this value too much reduces sensitivity, so that even strong strikes on the pad are sounded at low volume (less dynamic). Finding the middle road while you play your drum kit is key.

Note: Try not to overdrive the pad sensitivities with your playing. Look at the meter on the module and try to keep the hardest strikes just below max velocity

Trigger Threshold...

Threshold pertains to the minimum sensitivity of the pad. This setting allows a trigger signal to be received only when the pad is hit above a determined force level (a.k.a. velocity). Threshold can be used to generally prevent a pad from mis-triggering because of vibrations from other drums/pads. Check this with your pads and adjust accordingly. Usually a setting ranging from 2 to 6 is acceptable, but if you still find mis-triggering happening, keep adjusting up. This setting works in tandem with the XTALK setting.

Advanced Trigger Settings...

SCAN TIME: 1.4 is optimal / 2.0 is standard

Strike Force: You may notice that identical hits (velocity) you play may produce sound at different volumes. Adjust the "Scan Time" so your way of hitting/playing can be detected more precisely by the module. While repeatedly hitting the pad at a constant force, gradually raise the Scan Time value from 0ms, until the resulting volume stabilizes at the loudest level. At this setting, try both soft

and loud strikes to make sure that the volume changes appropriately. With higher settings, latency increases so set this to the lowest value possible you are comfortable with

RETRIG CANCEL: 1 for Roland Pads is standard – 6 for all types of Roland CY Cymbals is standard.

Correcting mis triggering:

Important when you are especially using acoustic drum triggers or “non” Roland brand triggers.

Many aftermarket triggers produce altered waveforms, which may also cause mis-triggering. This occurs at the decaying edge of the waveform which is annoying when you hear it. Retrig Cancel detects this and prevents it from occurring. To Adjust: while repeatedly striking the pad, raise the “Retrig Cancel” value until retriggering no longer occurs. Although setting this to a high value prevents retriggering, it then becomes easy for sounds to be omitted when the drum is played fast (roll etc.). Set this to the lowest value possible while still ensuring that there is no retriggering.

You can also eliminate this problem of retriggering with the Mask Time setting. Mask Time does not detect trigger signals if they occur within the specified amount of time after the previous trigger signal was received. Retrig Cancel detects the attenuation of the trigger signal level and triggers the sound after internally determining which trigger signals were actually generated when the head was struck, while weeding out the other false trigger signals.

MASK TIME: 4-8ms is optimal / 8-10ms is standard.

Double triggering prevention: When playing a kick trigger – it is quite common for the beater to bounce back and hit the head a second time immediately after the intended strike. Many times, on acoustic drums the beater stays against the head and you do not hear it. Anyway, this bounce back causes a single hit to “double trigger.” The Mask Time setting helps to avoid this extra dbl trigger. Once a pad has been hit, any additional trigger signals occurring within the specified “Mask Time” will be ignored.

Adjust the “Mask Time” value while playing the pad.

When using a kick trigger, try to let the beater bounce back and hit the head very quickly, then raise the “Mask Time” value until there is no more sound made by the beater rebound.

XTALK CANCEL: 15-30 is optimal / 30-80 is standard and will depend on your setup.

Do not be afraid to max these values out. When multiple pads/drums/cymbals are attached to the same stand, this Crosstalk Cancel setting prevents vibrations produced by a strike from falsely triggering the other pads/drums/cymbals. For example, if Crash 2 is falsely triggered when you strike TOM 2, you will increase the XTalk Cancel value of Crash 2 until crosstalk no longer occurs.

Note: If the setting is too high, a strike played on Crash 2 **might** be omitted when Tom 2 and Crash 2 are played simultaneously. If you experience this lower both XTALK values on both pads.

Tips & Tricks

Using ATLAS with a live PA...

ATLAS kits 81-100 are optimized for STEREO/HEADPHONE USE. The settings below will help dial in your drum sound thru speakers.

Room/OverHeads/MFX Reverbs: Avoid the larger hall settings when gigging. Most of time: Less is more. **To adjust: Press “AMBIENCE”, then “ROOM – OVERHEADS”** and adjust LEVEL. MFX settings are found at mixer button then paging down.

PAN: Tom and cymbal separation can also be adjusted using the PAN edit feature to widen or reduce the depth of your instruments without harming the kit model. Keeping a tighter pan will sound better through the PA.

Master EQ: Reduce or Add low/hi eq frequency amounts to even out your kit models on the PA. Use PAD EQ settings to help fine tune the sounds of the kit. Sometimes reducing Bass is the way to add Treble. Subtractive EQ-ing works well with Boomy PA's.

SNARE EQ/VOL: To help your Snare cut through the mix... Snare depth is at 160-250 HZ, Snare body is at 400-630, Snare clarity is at 2 kHz. Adjust the EQ frequencies in your snare channel until your Snare is cutting while guitars and vocals are present. Crank the output volume level of the snare in the TD-50X to assist.

LOW XSTICK / HI HAT PEDAL VOL: To adjust: Press “Mixer”, then KIT VOL – use arrows/dial to make adjustments.

STEREO L/R OUT to PA: For a simple stereo connection to the mixing console use the TD50X XLR outputs. You can then add / reduce the desired effects to accommodate the current environment.

**** MONO L Output:** If in Mono, send your signal via the L MONO OUT. We suggest panning to L30 on all triggers for your particular gig kit. This should greatly enhance your drum set’s power in the PA. Panning this way should give you much stronger/ punchier audio and help curb the “drown in effects” wash sound.

Contact & Support

If you have questions before attempting any of the procedures above, please refer to your Roland TD-50X owner’s manual, or feel free to email **V Expressions Ltd** from the appropriate link on our website at www.vexpressionsltd.com

Contact Information:

Expansion Pack	Programmer	Contact
TD-50X Atlas	Chris Blood	email: fiddlebak@gmail.com

All programmed sounds are Intellectual Property Copyrighted © 2023 V-Expressions Ltd.
Copying, distributing and all unauthorized use of these sounds is strictly prohibited.
All rights reserved.